



RTMU86

Ethernet Wiegand NFC and 2d barcode Scanner



Presently, more and more access control system begins to mix bar code reading and NFC reading together, while traditionally, the Wiegand interface is widely used for the access control system. But at the same time, wireless or Ethernet data transfer becomes a trend and would be more and more popular for access control data transfer, because wireless or Ethernet is somehow more convenient, easy to install, supports remote control, and also it would be more cost-effective.

This RT-MU86 aims to meet this market requirement and the trend, it supports either Wiegand interface or Ethernet, read both bar codes and NFC, it's outstanding in:

- | **Capable to read both bar code and NFC card**

The RT-MU86 can read 1d code, 2d and QR bar code, and **NFC card**. This makes it as a two-in-one terminal.


- | **Support Ethernet or Wiegand (optional)**

Except RS485 interface, the RT-MU86 also supports **Wiegand and Ethernet** communication.



- **Holder design for easy installation**

Just fix the holder in the wall via 2 screws, then fix the reader in the holder and lock it by the screw from the bottom, done.

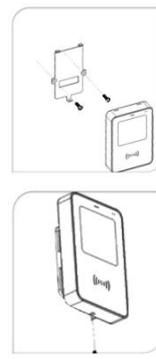

- **Built-in relay**

With Built-in relay and 12V-24V wide voltage input, the RTMU86 can connect to the access control system directly and no need Voltage conversion equipment.

Performance	Image Sensor	640 * 480 CMOS		
	Reading distance	0-10cm (differ for different size code)		
	Reading speed	100ms per scan		
	Scanning window	60*56mm		
	Symbologies	2D	QR Code, PDF417, Aztec,etc.	
		1D	EAN-13 ISBN-10, CODE_39, CODE_93, CODE_128, ITF, etc.	
	Scan Mode	Sense mode: detect and read automatically		
	Scan Angle	Roll: 360°, Pitch: ±63.5°, Skew: ±59.5°		
	Field of View	Horizontal 72°, Vertical 54°		
	Resolution	≥7mil		
Min. Symbol Contrast	25%			
Mechanical/ Electric	Interface	RS485, Wiegand, Ethernet (Built-in Relay)		
	Dimensions	132mm*88mm*21mm		
	Weight	200g		
	Notification	Buzzer, Blue\white state indicator light, Red\green read indicator light		
	Operating Voltage	12V-24V		
	Current	100mA (Typically 12V)		
NFC	13.56Mhz ID card	Only supports reading the physical card number. Mifare_UltraLight, Mifare_One(S50), Mifare_One(S70), Mifare_Pro(X), Mifare_Desire.		
Environmental	Operating Temperature	-20°C to 70°C		
	Storage Temperature	-40°C to 80°C		
	Humidity	5% to 95% (non-condensing)		
	Environment illumination	0~80000LUX (not direct sunlight)		

Application:

Can be widely used for all kinds of access control applications.

- Office victors access control
- Building access control
- Factory access control
- Museum
- Tourist sites
- School
- ...

Tel: +86 755-23762089 

Website: www.rtscan.net Email: sales@rtscan.net

Add: 553-555, Dongming Building, Minzhi Street, Longhua District, Shenzhen 518109, China

Copyright RTscan Technology Limited all rights reserved. RTscan is a registered trademark of RTscan Technology Limited. All other trademarks are the property of their respective owners. In a continuing effort to improve our products, RTscan Technology Limited reserves the right to change specifications and features without prior notice.

RTSCAN